

RD7.5 – Shock and Damper Actuator – Specification Sheet

the RD7.5 by CTW Automation

Standard features:

- 7.5 HP AC motor with computer controlled variable speed drive
- 5K Pancake load cell for +/- 5,000 lbf. range
- 4 Clamp cross bar
- Columns for 37" test opening
- Strokes set at 0.5" – 1.5" – 2.0" – 4.0" spacing
 - Or Metric at 20-25-40-50-75-100 mm
- IR-Temperature sensor and quick release mount
- CTW Probe analysis software
- Clevis fixtures, ½" with pins and brass buttons – set
- Input power 200-240 VAC III phase – 46 A(i)

Options:

- Longer columns +12"/300mm: \$200.0
- Clevis fixtures (exchange for standard ½")
 - 3/8" or 5/16" – NC
- High voltage 380/440 VAC III phase- 21 A(i): \$500.0





The RD7.5 uses CTW-Probe Analysis software to allow the user to create and run Tests of various velocities on one of three strokes to collect force data that is presented in different industry standard graphs. The RD7.5 is a floor model designed to be structurally sound where loading is applied based on FEA analysis. Measurements are taken based on the line of actuation to ensure only the damper or specimen result is recorded.

Standard System Features:

Sensors and signals:

Displacement, Force and Temperature via an infrared non-contacting sensor are standard. **Velocity** is derived from Displacement giving (4) channels to be used in viewing the resulting data.

- Force / load is measure via Interface 5K pancake design with an integrated cable to ensure accurate and repeatable results.
- Displacement is mounted on the centerline of the actuator to deliver a true sine wave on the axis of load.
- Temperature is mounted on an easy to move, CTW custom quick clamp allowing the User to test any damper at a constant point helping to improve consistency in comparing dampers and changes.

Data Acquisition:

Data is collected and converted to digital output via a 16-bit, simultaneous sampling 8 channel USB card. This interface is located inside the frame of the machine for protection and seamless connection between the sensors and the card. A USB cable is supplied to complete the connection to the computer.

Electronics:

CTW uses a proprietary design 5 channel board (standard) to collect the sensor signals before passing them to the data card. There are options for additional channels and sensors if needed including multiple load cells and pressure sensors.

Strokes:

The RD7.5 comes standard with a choice of stroke spacing of 0.5", 1.0", 2.0" and 4.0", and the buyer can option to have metric spacing instead at 20-25-40-50-75-100 mm, to allow the user to fit a wide variety of dampers. Strokes are changed manually by the User and can be done quickly in less than a minute start to finish. While the different strokes help accommodate different length dampers they also provide a frequency change to gather more information on any damper.

Velocity:

Peak velocity can only be achieved on the largest stroke and the proper three phase voltage and amperage. It is limited by the amount of HP in the motor and for this model it is 7.5 HP. Based on the force of the damper, velocities higher than 80.0 in/sec and as low as a few tenths of an inch/sec. can be achieved. See graphs for more details on force and velocities.



Columns:

Columns are 1.50" diameter and standard length provides a test opening of 37.5" / 940 mm from the end of the load cell stud to the top of the actuator. Longer columns can be purchased in additional 12" / 300 mm increments. This may be needed for testing motorcycle forks or other very long dampers.

Power input:

The RD7.5 runs on 208-240 VAC three (III) phase input @ 46 A(i). There is an option to have a high voltage input allowing the machine to operate on 380-500 VAC III phase @ 21 A(i) (such as Europe and Asia). This is an either-or option (not both); it must be picked at time of purchase.

* Note – Outside of the USA, typically there is only 220 single (low voltage) OR 380/440 three phase (high voltage). That is different than the USA which has a low voltage single and three phase option.

* Note – for peak performance, three phase (III) must be supplied.

Software:

CTW machines are controlled using proprietary CTW Probe analysis software. This allows the User an easy to use, command driven platform to interface with the machine. While simple to use, the software is very flexible for the advanced user to go into further detail and procedures to give quick graphical and numeric data. See website for additional information.

Training:

Training is not required but it is the only way to get the most out of your machine. You are welcome to come to Lexington for training or we can come to you at an additional cost. CTW also provides training videos and help on our YouTube channel.

Support:


The RD7.5 comes with a 1 -Year phone and e-mail support contract as well as use of TeamViewer remote access ability for training and help. We want you to have every opportunity to use and get the most from the machine.

Warranty:


The RD7.5 comes with a 1 -Year limited warranty on any item based on failure outside of user misuse.

Delivery:


- Customer can opt to pick-up in Lexington, NC but then NC State tax applies
- Shipping – to be determined
 - By ground transport in Continental US
 - International shipping is not a problem

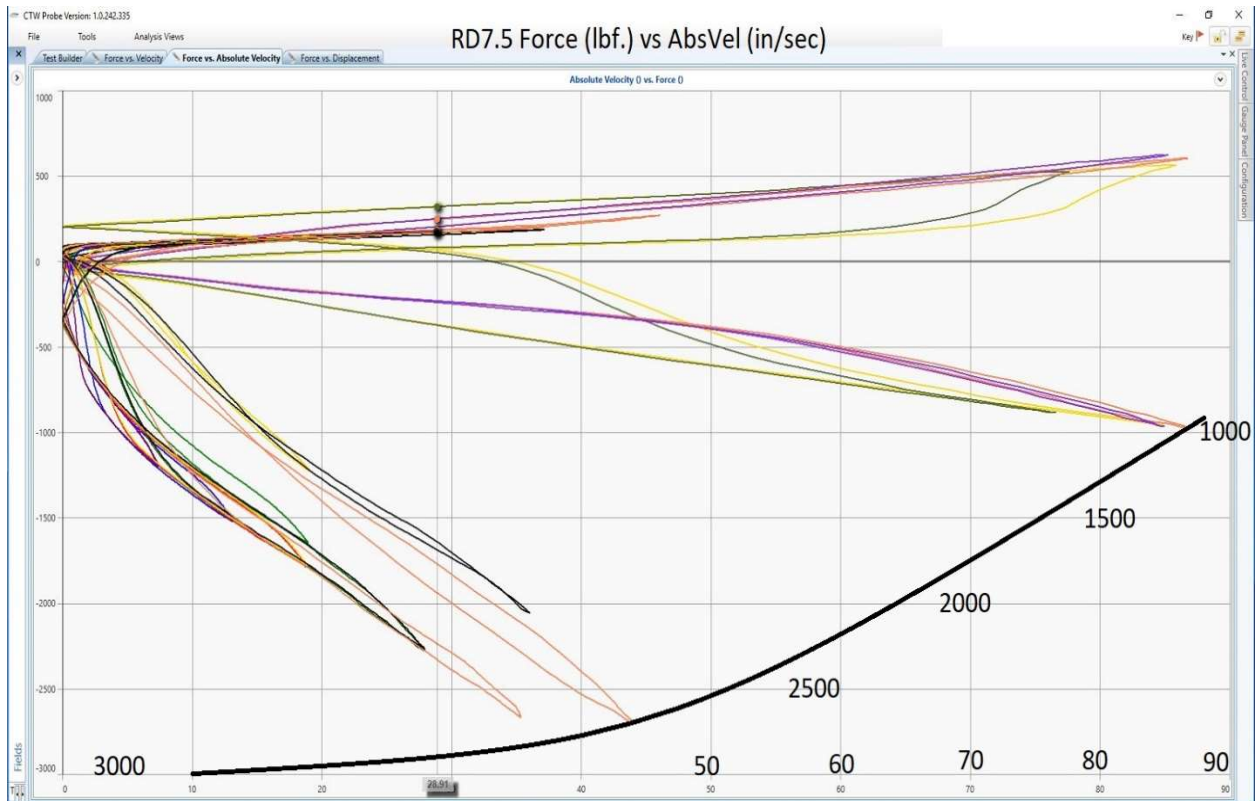

RD7.5 Force Curve Estimates – Imperial Units (III phase power)

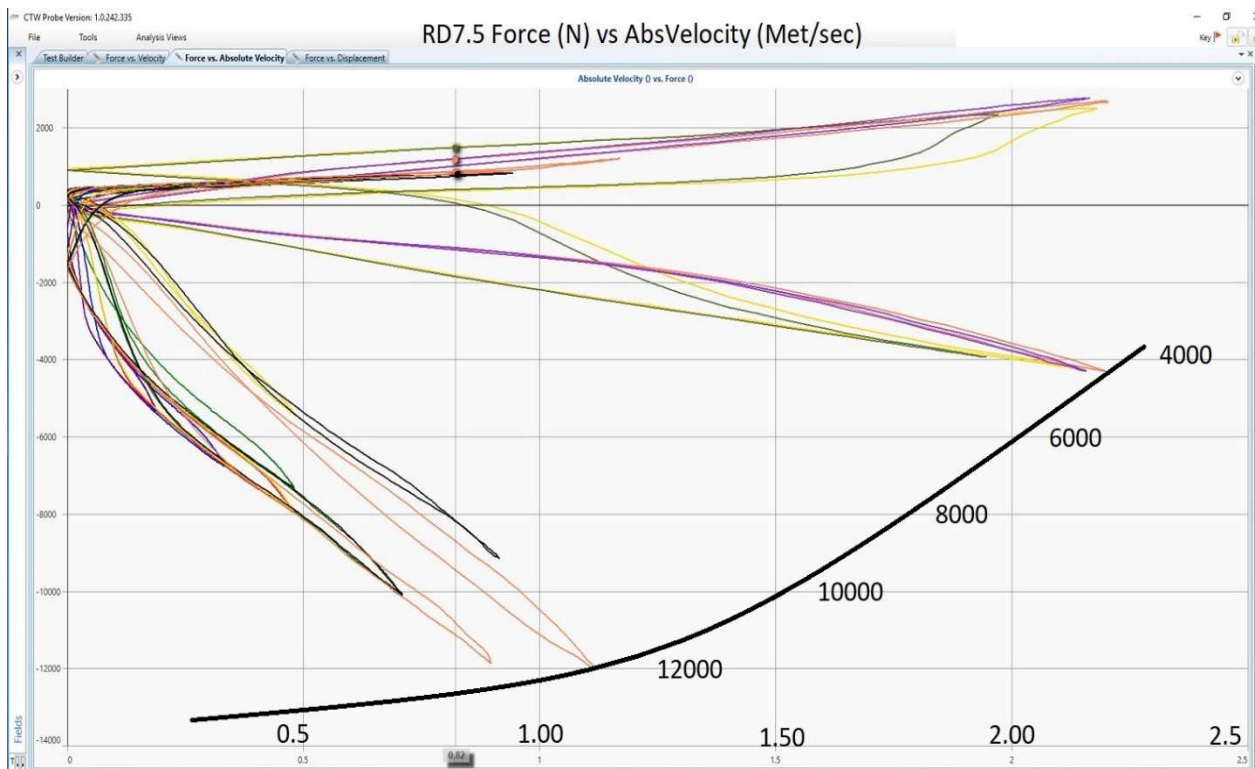

RD7.5 Force Curve Estimates – Metric (III Phase power)

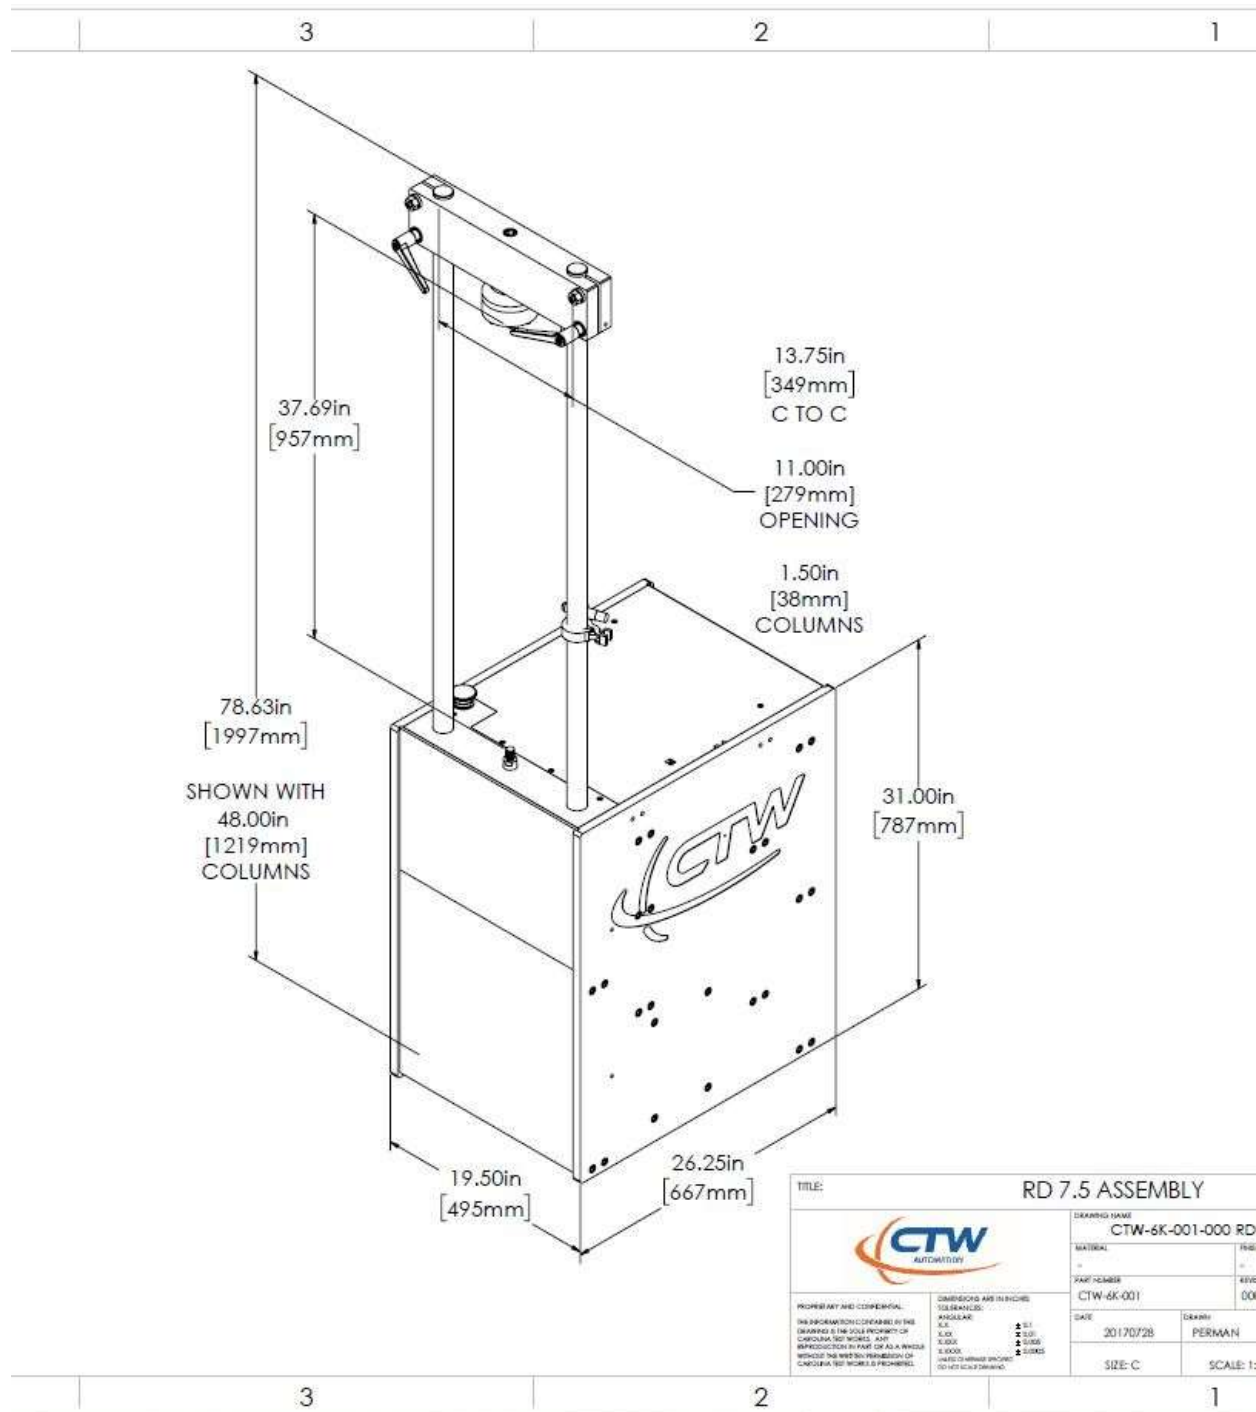

General Dimensional Outline of RD7.5